


LIGHTING

LED FLOODLIGHTS

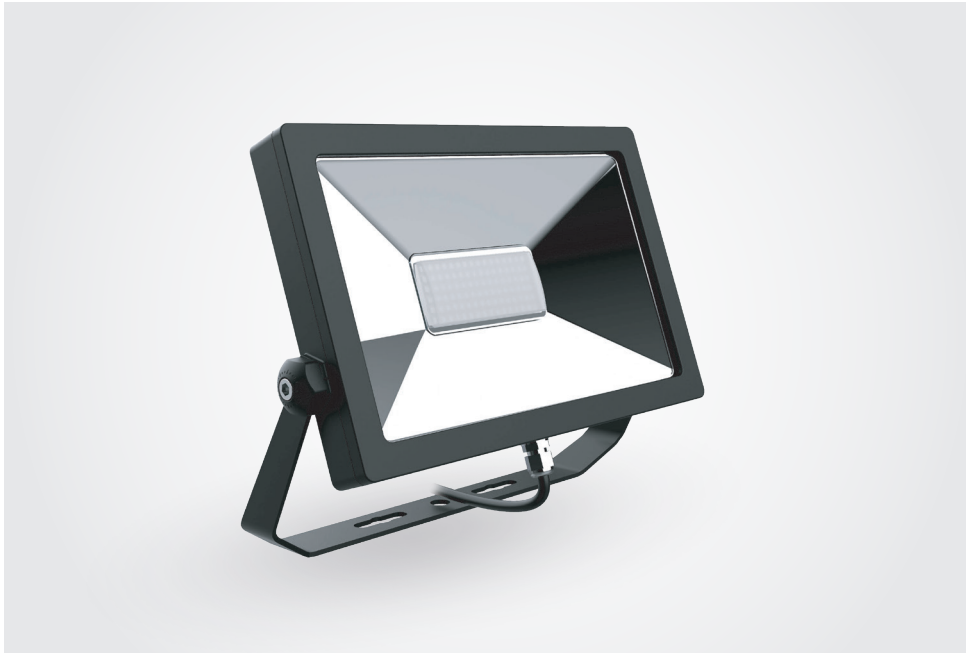

SLIMLINE FLOODLIGHT SERIES

The Slimline Floodlight range is lightweight and easy to install. Using Phillips LED chips and delivering over 120 lumens per watt, this highly efficient floodlight combines high energy savings and crisp even light distribution across its broad beam angle.

With an IP65 rating and suitability across a wide temperature range, the Slimline Floodlight is built to withstand the elements. The 70W model also includes a dual motion and lux sensor.

FEATURES

- High efficacy
- Lightweight and slimline
- Flex and plug included
- IP65 rating
- Dual motion and lux sensor (70W model)

SPECIFICATIONS

POWER FACTOR	>0.9	MODEL NUMBER	CCT	DIMENSIONS	WATT	LCP	LUMENS	EFFICACY
CRI	>80	EP-FLG2-15	5000K	148x38x117mm	15	14.80	1800	122lm/W
BEAM ANGLE	110°	EP-FLG2-30	5000K	200x43x149mm	30	28.44	3401	120lm/W
IP RATING	65	EP-FLG2-50	5000K	250x51x188mm	50	49.61	6302	128lm/W
LIFETIME (L70)	>70,000h							
WARRANTY	5 Years	EP-FL-70G2-70S	500K					

